


# 49" Touch Screen Dual Digital Signage Standee

Right message at the right time

**JXD DDS490PCT**

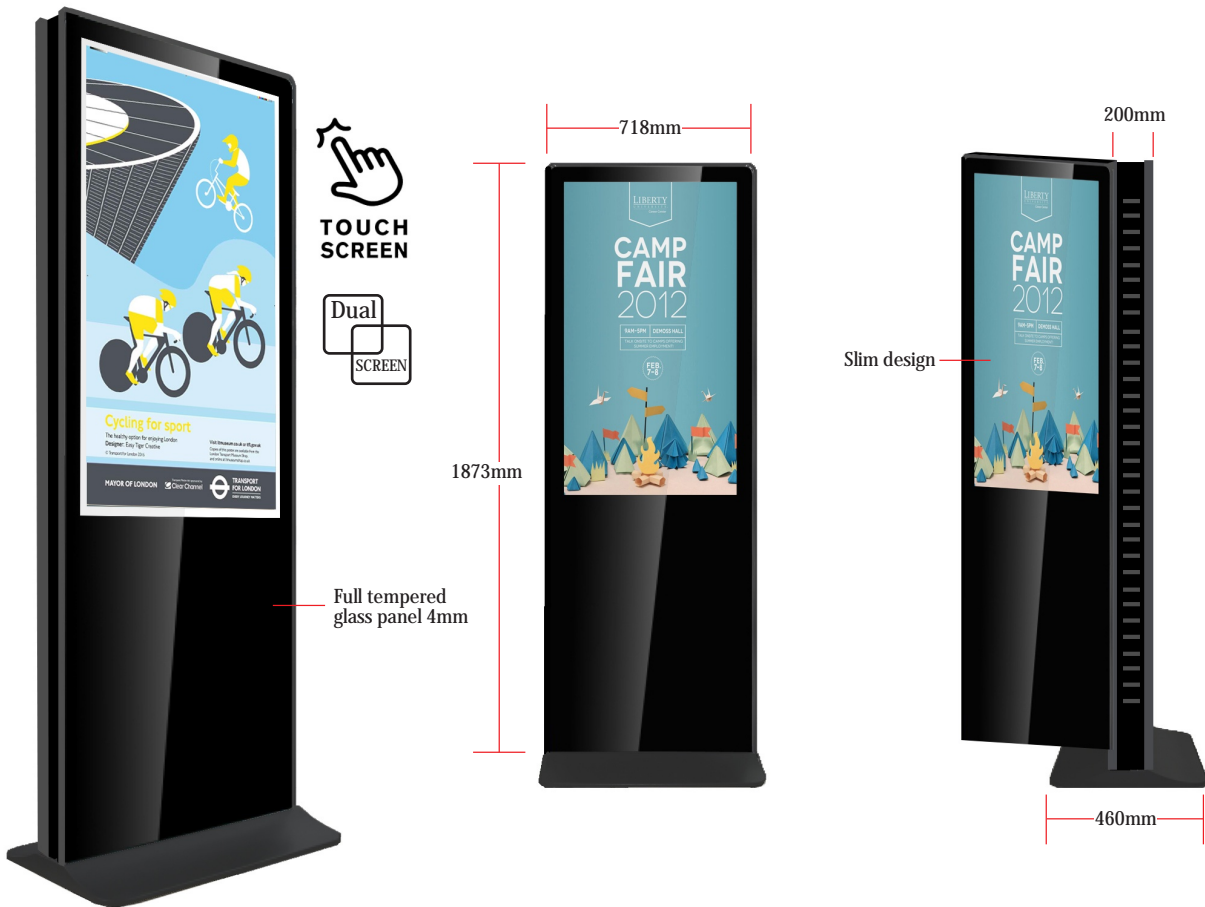

## Specifications

PANEL	Panel Type	49" TFT LED	MULTIMEDIA	USB Playback Audio	AAC, AIF, AIFF, ASF, LPCM, M3U, M4A, MP3, MP4, WAV, WMA		
	Lamp Type	WLED		USB Playback Picture	BMP, GIF, JPEG, JPG		
PC SPECIFICATION	Max Resolution	1920 x 1080	TOUCH	USB Playback Video	M2TS, M4V, MK3D, MKV, MP4, MPEG MPG, MTS, TS, TTS, VOB, WMV		
	Aspect Ratio	16:9 (Portrait / Landscape)		POWER	Operating Temperature	0°C to 40°C	
	Contrast Ratio	1400:1	SOUND			Storage Temperature	-20°C to 60°C
	Brightness	500cd/m2		TEMPERATURE	DIMENSION & WEIGHT		Standee Size
	Response Time	8ms	CONNECTOR			Base	718 x 48 x 460mm
	Display Area	1102 x 638mm		CONNECTIVITY	Structure		Standee Weight
	Panel Size	1873 x 718 x 200mm	LAN			Material	Thickness
	CPU	Intel Celeron Quad Core Processor, 2.0 Ghz		RJ45 Port, 10/100m Ethernet	WIFI		
		Chipset	Intel HM76			3G (Optional)	WCDMA
	BIOS	Intel HD Graphics 4000	HDMI x 1	VGA x 1	RJ-45 x 1		
OS	Windows 10 IOT	HDMI x 1				VGA x 1	RJ-45 x 1
Memory	4GB RAM, 120GB SSD		HDMI x 1	VGA x 1	RJ-45 x 1		
Audio	Realtek ALC662	HDMI x 1				VGA x 1	RJ-45 x 1
Ethernet LAN	2 x RTL8111e LAN		HDMI x 1	VGA x 1	RJ-45 x 1		