


75" Touch Screen Dual Digital Signage Standee

JXD DDS750PCT

Right message at the right time

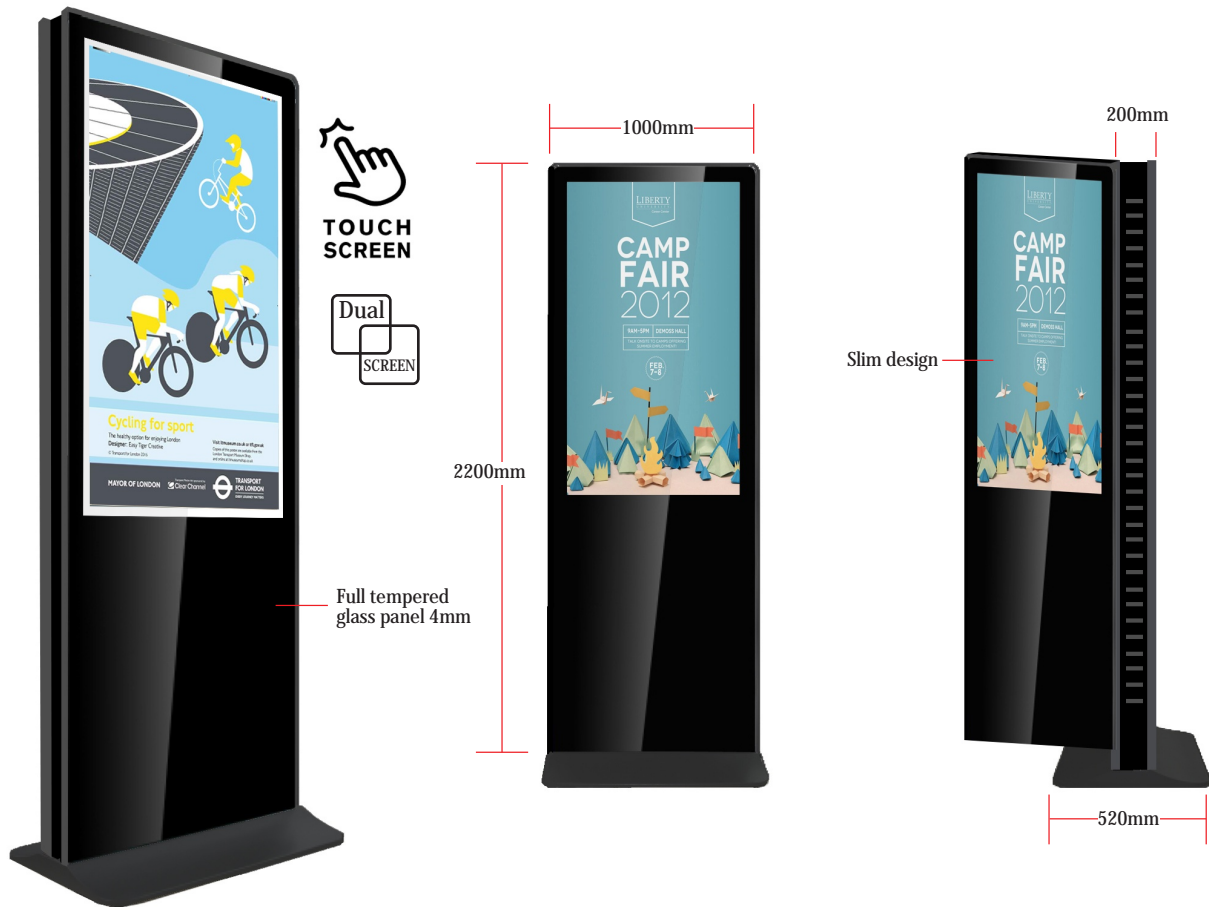

Specifications

PANEL	Panel Type	75" TFT LED	MULTIMEDIA	USB Playback Audio	AAC, AIF, AIFF, ASF, LPCM, M3U, M4A, MP3, MP4, WAV, WMA
	Lamp Type	WLED		USB Playback Picture	BMP, GIF, JPEG, JPG
	Max Resolution	1920 x 1080		USB Playback Video	M2TS, M4V, MK3D, MKV, MP4, MPEG
	Aspect Ratio	16:9 (Portrait / Landscape)			MPG, MTS, TS, TTS, VOB, WMV
	Contrast Ratio	1400:1	TOUCH		Multi 10 points IR touch
	Brightness	500cd/m2			
	Response Time	8ms	POWER	Main Power Consumption	AC 100-240V, 50-60Hz 170W
	Display Area	1681 x 965mm			
	Panel Size	2200 x 1000 x 200mm	SOUND	Built-in Speaker	2 x 10W
PC SPECIFICATION	CPU	Intel Celeron Quad Core Processor, 2.0 Ghz	TEMPERATURE	Operating Temperature	0°C to 40°C
	Chipset	Intel HM76		Storage Temperature	-20°C to 60°C
	BIOS	Intel HD Graphics 4000	DIMENSION & WEIGHT	Standee Size	2200 x 1000 x 200mm
	OS	Windows 10 IOT		Base	1000 x 48 x 520mm
	Memory	4GB RAM, 120GB SSD		Standee Weight	260kg
	Audio	Realtek ALC662		Base Weight	18kg
CONNECTOR	Ethernet LAN	2 x RTL8111e LAN	STRUCTURE	Material	MS Steel Plate Frame
				Thickness	1.2 - 1.5mm Slim Smart Design
	Rear Panel I/O	HDMI x 1	FEATURE		Moistureproof, Anti-rust treatment, Anti-dust, Static Free
		VGA x 1			
		RJ-45 x 1	ACCESSORIES		Castor, User Manual, Keys, Tools & Screws
		USB 2.0 x 1			
		USB 3.0 x 1			
		Audio I/O (Mic & Line Out)			
CONNECTIVITY	LAN	RJ45 Port, 10/100m Ethernet			
	WiFi	Built-in WiFi 802.11B B/G/N			
	3G (Optional)	WCDMA			

Recommended Backend CMS

NAVORI
DIGITAL SIGNAGE ENGINE

Specifications are subject to change without prior notice
Trademarks are the property of their respective owners
Copyright © 2018 All Rights Reserved

Version 1.0