

LED-E012i-108

108" Indoor LED 1.25mm Full HD Bundle

Datasheet



Nothing less than magnificent

The NEC E Series provides cost conscience customers impressive LED imaging without compromising on the service and support expected from the Sharp/NEC brand. This 108" Full HD kit is built with NEC's 1.25mm LED-E012i module designed to deliver all the advantages of a seamless LED display in a cost effective package. This Full HD bundle is designed for viewing from 3ft to an optimal 7ft and includes everything required to install an LED wall, including a power bar, framing, mounting, and controller. The front serviceable design allows easy access and quick maintenance when needed. The E series bundles are an ideal solution for boardrooms, education, auditoriums, retail, and more.

Benefits

Front Serviceable Design – minimizes downtime by providing easy access and quick maintenance

Modular Design – with a 16:9 aspect ratio and a 27" diagonal allows for an accessible alternative to existing LCD video walls


Hot-Swappable Pixel Cards – can be replaced without turning the display off

Thin and lightweight design - allow for greater installation flexibility while also meeting ADA requirements



| Direct View LED Kit | | LED-E012i-108 |
|--------------------------|--------------------------|---|
| DISPLAY | Panel Technology | Direct View LED |
| | Pixel Configuration | 3-1 SMD (Black) |
| | Panel Resolution | 1920 x 1080 |
| | Aspect Ratio | 16:9 |
| | Pixel Pitch | 1.25mm |
| | Brightnes (typical) | 600cd/m ² |
| | Contrast Ratio (typical) | 5000:1 |
| | Viewing Angle (typical) | 85/85 horizontal / 80/80 vertical |
| | Dimming Capability | 256 levels |
| | Color Processing | Up to 16 bit |
| | Displayable Colors | 281 Trillion |
| | Refresh Rate | Up to 3840 Hz |
| | Lifetime | 100,000 hours |
| CONNECTIVITY | Input Terminals Digital | 1 x 3G SDI; 1 x DVI-D; 1 x HDMI |
| | External Control | 1 x GenLock; 1 x LAN |
| POWER CONSUMPTION | On (typical) | 944 Watts |
| | Max | 2000 Watts |
| PHYSICAL SPECIFICATIONS | Dimensions (W x H x D) | 95 x 57.3 x 2.0in / 2412 x 1456 x 50mm |
| | Weight (Net) | 201.1lbs / 91.2kg |
| ENVIRONMENTAL CONDITIONS | Operating Temperature | -4° to 104°F / -20° to 40°C |
| | Operating Humidity | 10% to 80% |
| | Storage Temperature | -4° to 113°F / -20° to 45°C |
| | Storage Humidity | 10% to 85% |
| | IP Rating | IP20 |
| SHIPS WITH | | 1x LED Controller, LED Modules (16 Cabinets, 64Pixel Cards), Overframe Kit (4x4), Pixel Card Removal Tool, Power Bar; Spare Parts Kit, Wall Mount (4x4) |
| LIMITED WARRANTY | | 2 years |

Every bundle ships with

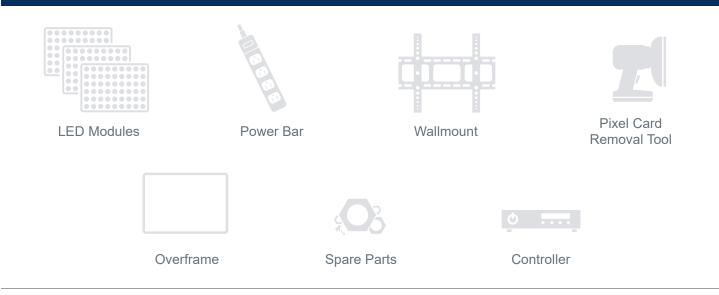

All other brand or product names are trademarks or registered trademarks of their respective holders. @2022 Sharp NEC Display Solutions of America, Inc. and the NEC logo are registered trademarks of NEC.